


GlassApeel Bubble Free Clear

WINDOW GRAPHIC

PRODUCT DESCRIPTION

- Dot-pattern (hemispherical) adhesive
- Easy to install
- No residue

STRUCTURE

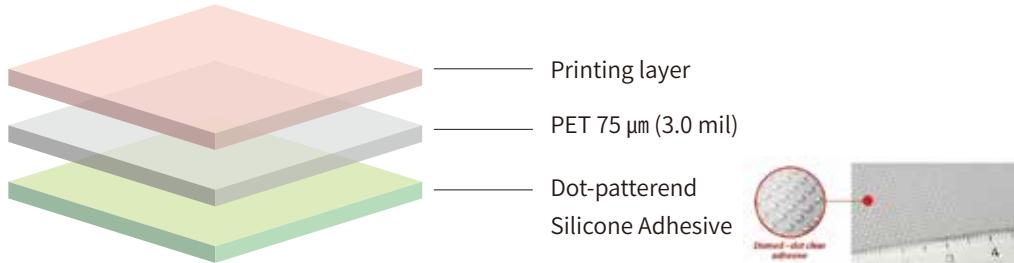

TECHNICAL AND PHYSICAL PROPERTIES

Property	Test Method	Unit	Value	Remark
Appearance	ASTM E284	-	Clear	
Base Thickness	ASTM D645	μm	75 ± 5	
Total Thickness	ASTM D645	μm	170 ± 10	
Total Weight	ASTM D646	g/m ²	205 ± 10	
Gloss	ASTM D2457	%	60°: 85°:	
Lab	ANSI T (D50/2°/Abs/No)	-	L:	
			a :	
			b :	
Whiteness	ASTM E313	-		
VLT	KS L 2514	%	-	
UV CUT	JIS 5759	%	-	
Peel Strength (Glass 20min)	ASTM D 903	g/25mm	≤ 25	
Peel Strength (Glass 24hour)	ASTM D 903	g/25mm	≤ 25	

Handling & Storage Instructions

Hold the media by the edges. Fingerprints will affect the quality of the image. A fresh pair of cotton gloves should be used while handling bare media to avoid sweat, grease and oil transfer on to the media that could interfere with the print quality.

To avoid curling, store the media in flat position. Store the media in cool, dry place [20-25°C, 55% +10% relative humidity (RH)] away from direct sunlight. The media should be stored in its original packing when it is not being used.

Usage Instructions

Best print results can be obtained at 20 - 25°C, 55% ± 10% relative humidity (RH). Please ensure proper earthing of the machine. Consider using the external static eliminator device for higher productivity. For details please contact us. Lamination after printing is advisable for extended print life. The lamination film must be checked for compatibility with the media.